



# PARCEL MAP

SANTA MARIA - TRACT N<sup>o</sup> 66-2

Being a portion of the SW 1/4 of Section 12,  
T.10 N., R. 34 W., S.B.B. & M., in the City of Santa  
Maria, County of Santa Barbara, State of California.

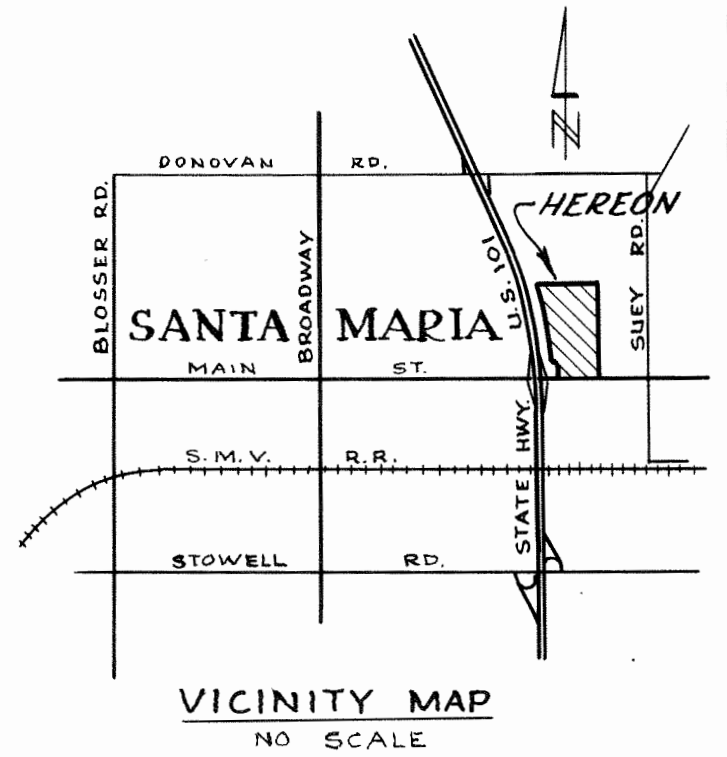

P.M. BK. I PG. 23

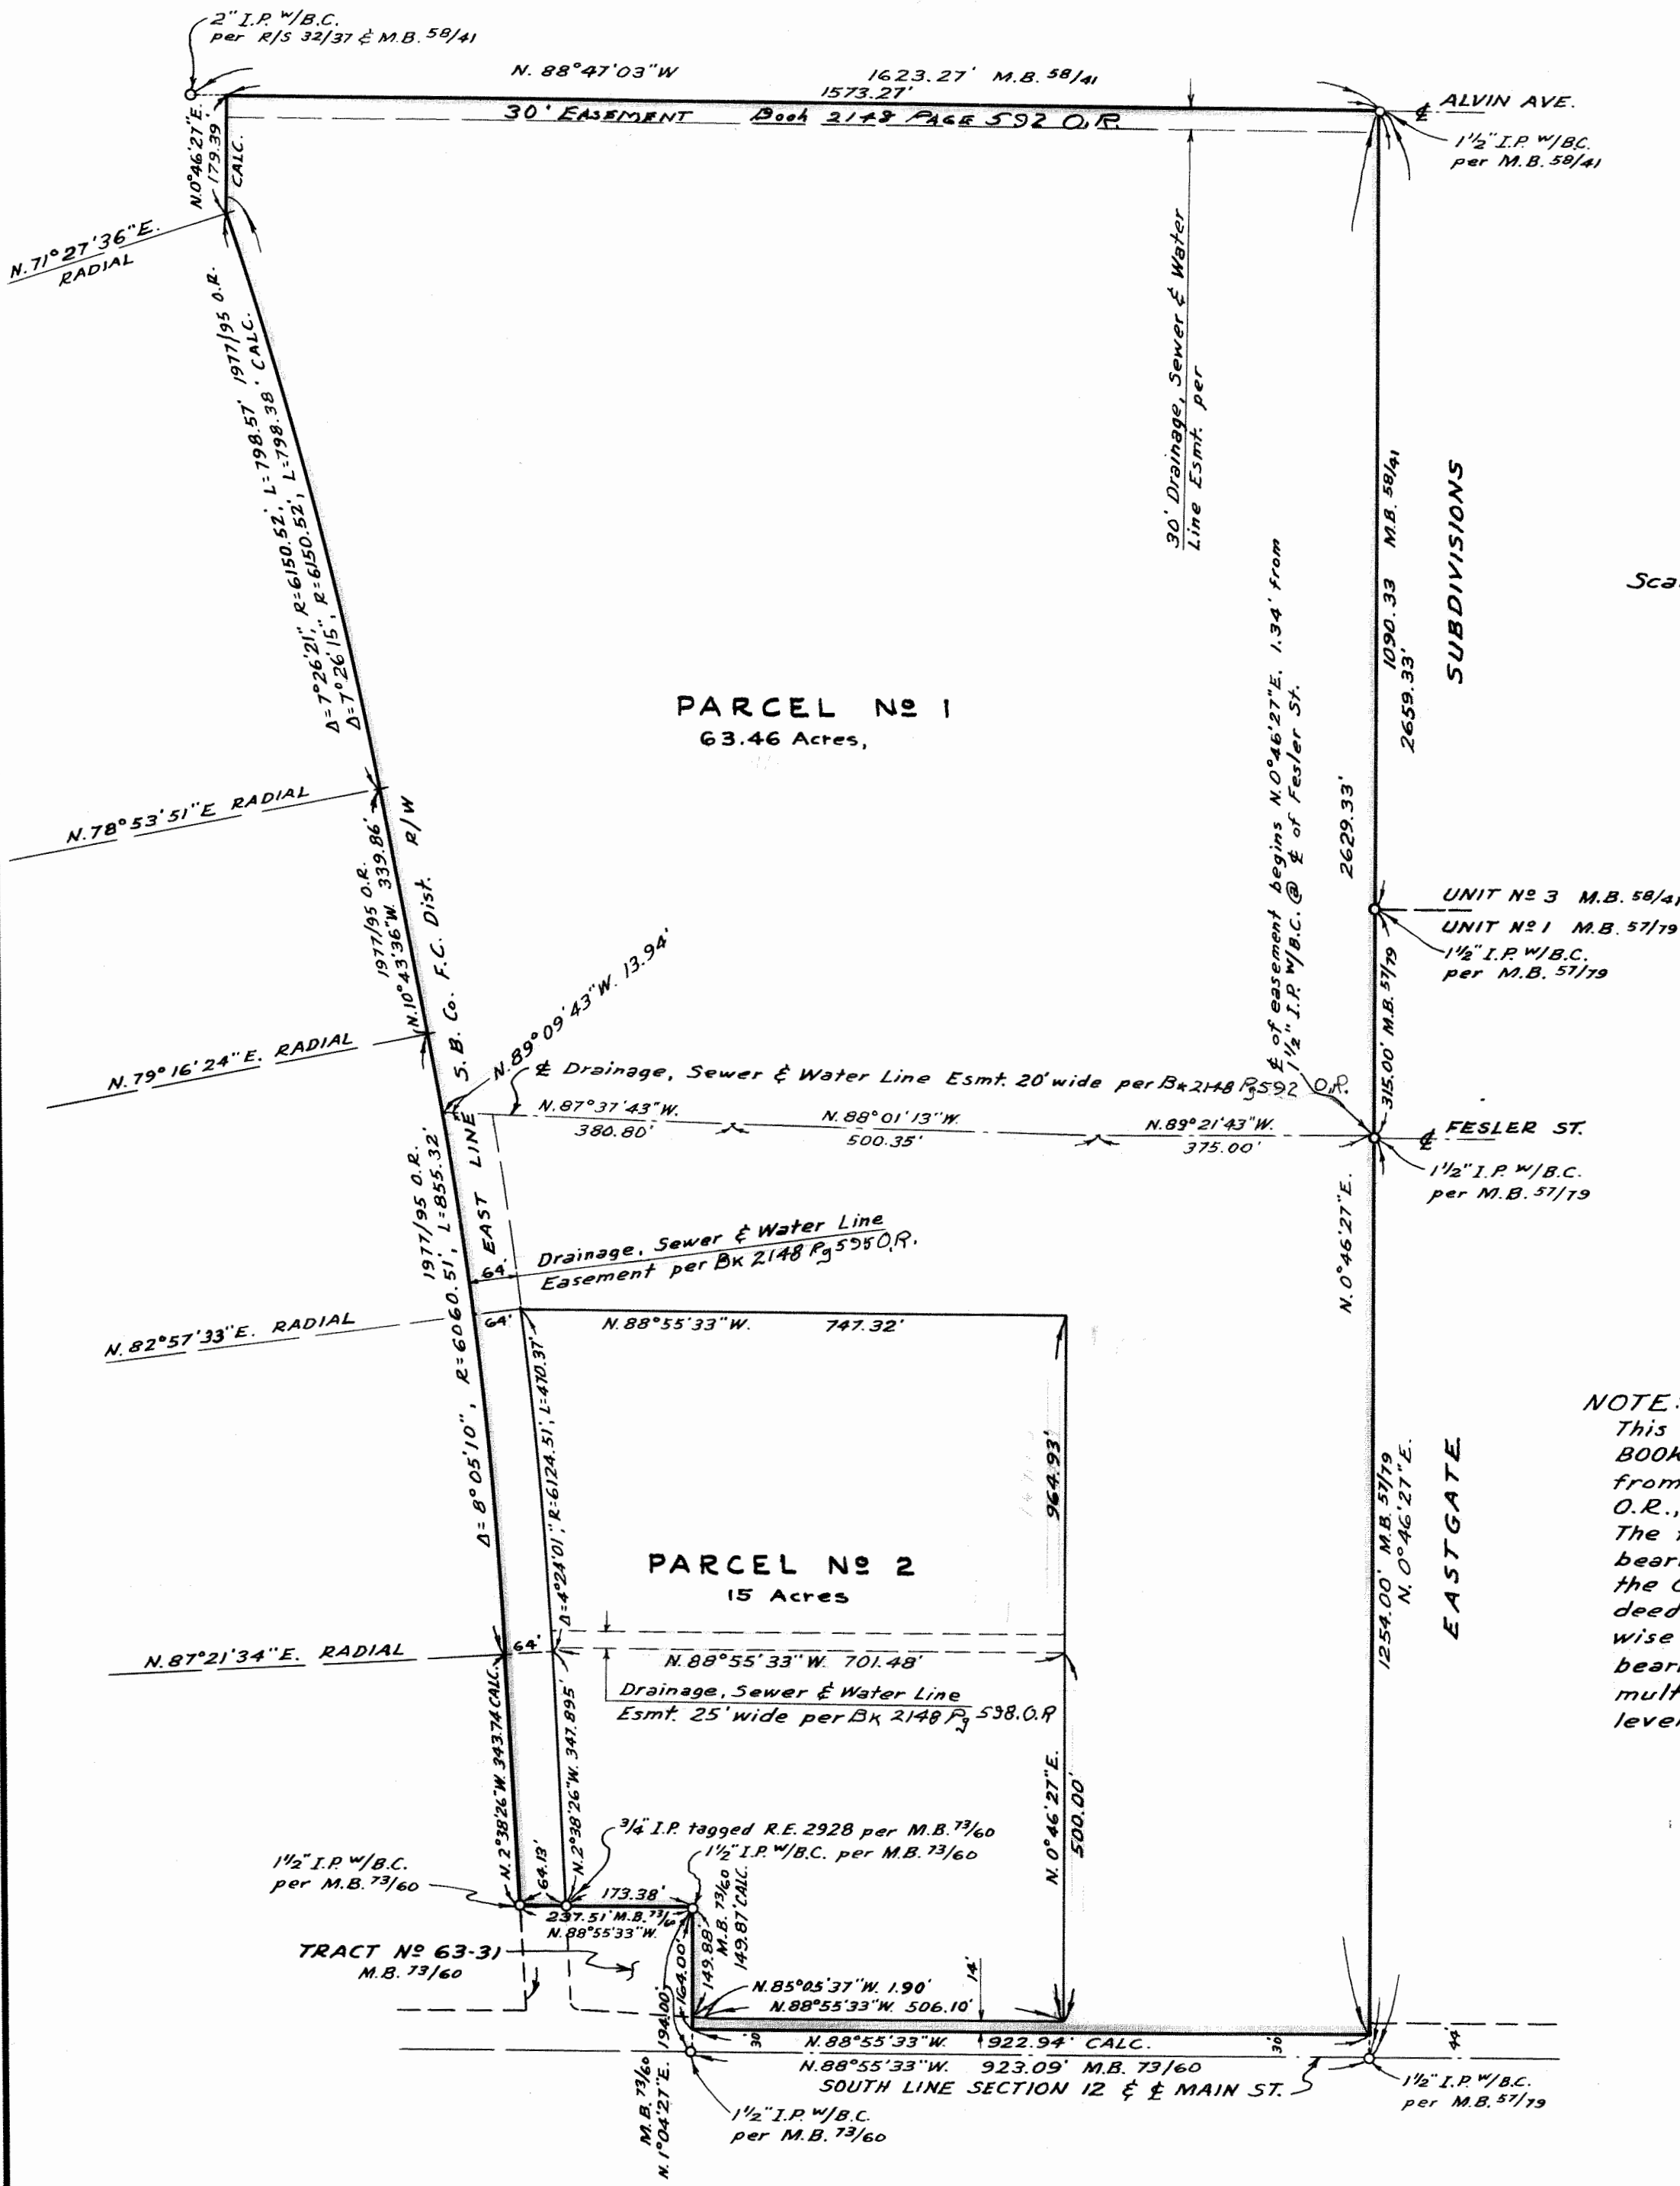

**NOTE:**  
This map is compiled from maps recorded in MAP BOOKS 57 page 79, 58 page 41 and 73 page 60 and from the deed recorded in BOOK 1977 page 95, O.R., records of Santa Barbara County. The three maps are all on the same basis of bearings. The deed bearings and distances are on the California Coordinate System, Zone 5. The deed bearings have been rotated counter-clockwise 1°22'00" to equate to this map basis of bearings and the deed distances have been multiplied by 1.00008435 to obtain ground level distances.

## SURVEYOR'S CERTIFICATE

This map was prepared by me or under my direction and was compiled from record data in conformance with the requirements of the Sub-division Map Act at the request of W. H. MSBRIDE on Jan. 15, 1966. I hereby certify that it conforms to the approved tentative map and the conditions of approval thereof; that all provisions of applicable state law and local ordinances have been complied with to the best of my knowledge.

*Robert H. Hager*  
5/1/66

## CITY ENGINEER'S CERTIFICATE

This map has been examined this day of April, 1966, for conformance with the requirements of Section 11575 of the Subdivision Map Act.

*Frank W. Safford Jr.*  
CITY ENGINEER, CITY OF SANTA MARIA

## RECORDER'S CERTIFICATE

Filed for record this 20<sup>th</sup> day of April, 1966, at 4:30 p.m. in Book 1 of Parcel Maps at page 23 at the request of Leger Surveys Inc. File No. 13216 Fee \$5.00

*RITA VAN BUSKIRK*  
By *Frances Oakland* COUNTY RECORDER

**LEGER SURVEYS, INC.**  
110 N. CONCEPCION, SANTA MARIA, CALIF. 925-5511  
**F - 685**