

SURVEY AND MAP BOOK REFERENCES

- Rec 1 - Book 23, Page 52 R/S
- Rec 2 - Book 27, Page 144 R/S
- Rec 3 - Book 27, Page 172 R/S
- Rec 4 - Book 60, Page 94 R/S
- Rec 5 - Book 61, Page 11 R/S
- Rec 6 - Book 65, Page 46 R/S
- Rec 7 - Book 51, Page 82 Maps
- Rec 8 - Book 51, Page 84 Maps
- Rec 9 - Book 55, Page 62 Maps

NOTE: SECTION CORNER LOCATION AS REPORTED IN BOOK 55, PAGE 62, MAPS (REC. 9), WAS ACCEPTED AS BEST EVIDENCE AVAILABLE AND CORNER WAS RE-ESTABLISHED ACCORDINGLY.

Set 1/2" I.P., RCE 11658, to replace the 3/4" I.P. w. tag RE 2928 set per bk. 61, Pg. 11, R/S and found on this survey, but subsequently destroyed by road construction

RECORDER'S CERTIFICATE

FILE NO. 38287
FILED THIS 26TH DAY OF SEPTEMBER 1973 AT 11:55 A.M. IN BOOK 12 OF PARCEL MAPS AT PAGE 57
AT THE REQUEST OF W.A. SOMMERMEYER.

RITA VAN BUSKIRK
COUNTY RECORDER
FEE \$ 5.00
BY *Thaneek Oakland* DEPUTY

SURVEYOR'S CERTIFICATE

THIS MAP WAS PREPARED BY ME OR UNDER MY DIRECTION AND WAS COMPILED FROM RECORD DATA AND A FIELD SURVEY IN CONFORMANCE WITH THE REQUIREMENTS OF THE SUBDIVISION MAP ACT. **B.H. RICHARDS** CONFORMS TO THE APPROVED TENTATIVE MAP AND THE CONDITIONS OF APPROVAL THEREOF AND THAT ALL PROVISIONS OF APPLICABLE STATE LAW AND LOCAL ORDINANCES HAVE BEEN COMPLIED WITH.

W.A. Sommermeyer 1-27-73
W.A. SOMMERMEYER R.C.E. 11658 DATE

COUNTY SURVEYOR'S CERTIFICATE

THIS MAP HAS BEEN EXAMINED THIS 26TH DAY OF SEPTEMBER 1973 FOR CONFORMANCE WITH THE REQUIREMENTS OF SECTION 11575 OF THE SUBDIVISION MAP ACT.

NORMAN H. CALDWELL
COUNTY SURVEYOR
BY *Edward C. Scholtz* ASSISTANT COUNTY SURVEYOR

MONUMENT DESIGNATION, CHARACTER, LOCATION & NOTES

- Monuments found as noted
- Set 1/2" I.P. with tag RCE 11658 unless otherwise noted
- ⊙ Monuments found as described below
- ⦿ 1/2" I.P. with tag LS 2263 per Rec 7 & 8 - not found

Mon. Desig.

Character - Location - Notes


- "A" State Hwy. Conc. Mon. - Sta 289+00 - E'ly R/W line Orcutt Road per Rec 1 & 3
- "B" 1-1/2" I.P. (open) no record - accepted as SW Cor of 4.637 Ac. parcel - Rec 3
- "C" 1" I.P. - RCE 2928 - Rec 3, 4 & 6
- "D" 3/4" I.P. - RCE 2928 - Rec 6
- "E" 3/4" I.P. - RCE 2928 - Rec 6 - mon. 0.12' S. of line
- "F" 1" I.P. open - no rec. - 3/8" Iron Rod, (0.02' N 40° 22' E / Rec 6) not found
- "G" 1" I.P. open - mon. 0.16' S. of line - accepted as 1" I.P. RE 2928 called for in Rec 3 & 6
- "H" 3/4" I.P. - open - per Rec 4
- "I" 3/4" I.P. - open - per Rec 4
- "J" 3/4" I.P. - RCE 2928 - Rec 3, 4 & 6
- "K" 2" I.P. - LS 3088 - no rec. - accepted as 1/16 cor. - Sections 2 & 11
- "L" 2" I.P. - LS 2921 - no rec. - apparently set in place of monument called for in Rec 7. Rec 7 calls for 2" I.P., LS 2263 set to replace a found 3/4" I.P. per Rec 2
- "M" 1/2" I.P. - LS 2921 - no rec. (MB 51-82 calls for 1/2" I.P. LS 2263)
- "N" Spike & Tag - LS 2921 - no rec.-tie sheets for Tract 10001 call for 3/4" I.P. w/tag LS 2921
- "O" 1/2" I.P. - LS 2921 - no rec. (MB 51-82 calls for 1/2" I.P. LS 2263)
- "P" 1/2" I.P. - open - no record - accepted as corner common to Lots 37 & 38 - Rec 8
- "Q" Found nail & tag, L.S. 3146 per M.B. 75-71
- "R" 6"x6" Standard Highway Dept. Mon. - no record - accepted as N. line Foster Road
- "S" 2" Bronze Cap - "TOY #6" - per Rec 1 - northerly R/W Foster Road

PARCEL MAP NO. 11691

BEING
PORTIONS OF SECTIONS
11 & 2
T9N, R34W, SBB&M

COUNTY OF SANTA BARBARA
CALIFORNIA

WILLIAM A. SOMMERMEYER
CIVIL ENGINEER
281 SOUTH MAGNOLIA, SUITE 4
GOLETA, CALIFORNIA

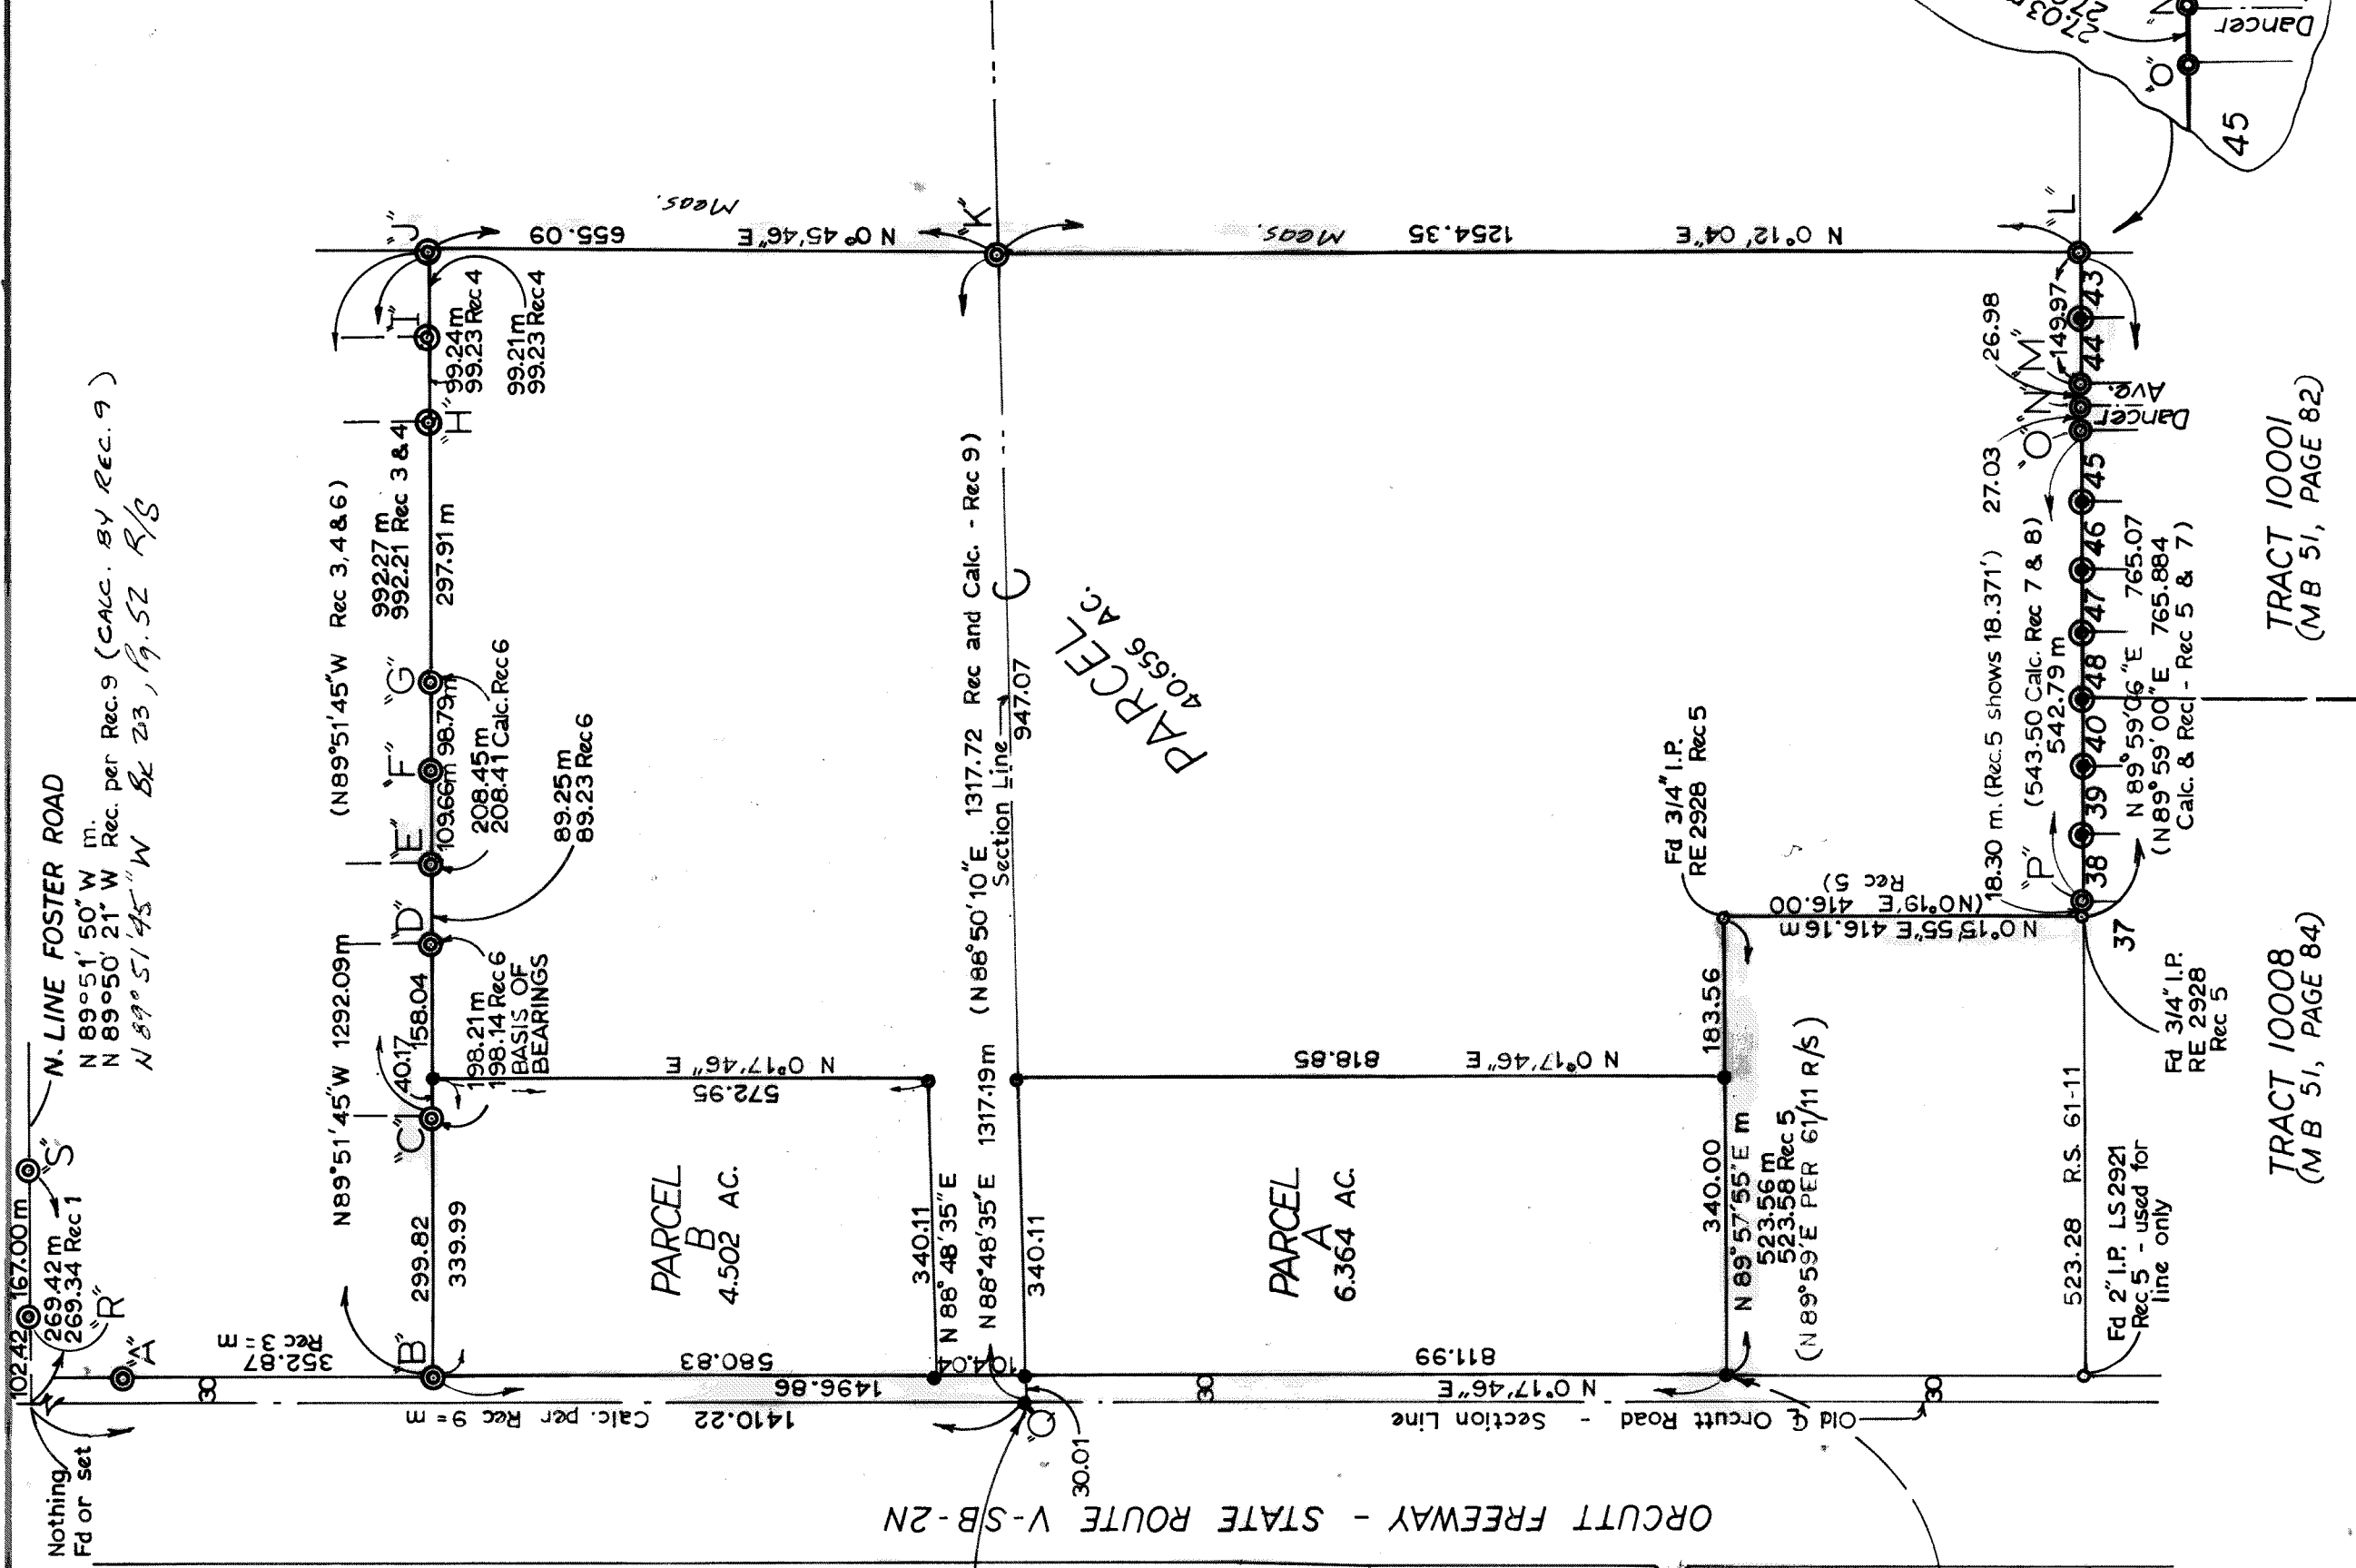

TRACT 10001
(M.B. 51, PAGE 82)

TRACT 10008
(M.B. 51, PAGE 84)

DETAIL
1" = 100'